

Complete fixture consists of Reflector Trim & Frame-In Kit. Select each separately

Reflector Trim		Frame-In Kit		Lamp
409BKX	Black Paint	Remodeler	400MRX	75W MR16
409MTX	Metal Paint	Remodeler	3401MREX	50W MR16
409SBX	Satin Brass Plated	Non-IC	402MRX	75W MR16
409STX	Stainless Steel Plated	Non-IC	402MREX	75W MR16
409WHX	White Paint	IC	402MRIC9X	50W MR16
		Non-IC	602MR	65W MR16
		Non-IC	603MR	65W MR16
		Non-IC	604MR	65W MR16
		Non-IC	604SQMR	65W MR16

## Features

- Housing:** 25ga. galvanized steel.
- Residence Mounting Clip:** Factory-installed; zinc plated spring steel ;free-hand installation. (patent # 2,184, 149)
- Aperture Plate:** Die-formed 24 ga. steel. Inner shield, welded to aperture plate; black finish.
- Adjustable Lampholder Support:** 27ga. steel; Rotates 358° horizontally and 0° to 40° vertically.
- Mounting Clips (2):** 24ga. spring steel, zinc plated. Provide easy snap-in / snap-out action.
- Lamp Guard:** 2" (51mm) dia. borosilicate glass.

## Frame-In Kit

**Note:** For complete Frame-In Kit specifications, see 400 frame specification sheets

## Labels

CSA, UL (Suitable for Damp Locations)

## Accessories

Square Face Plate  
400SQBK Black  
400SQWH White

Alzak® is a registered trademark of ALCOA.

## Job Information

## Type:

**Job Name:**

**Cat. No.:**

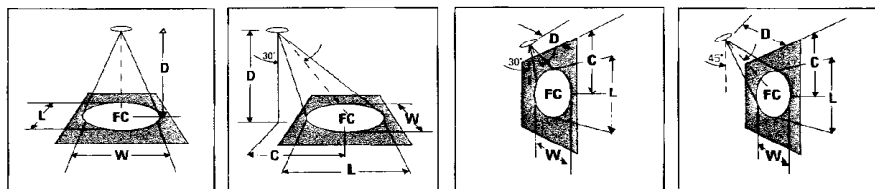
**Lamp(s):**

































**Notes:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2008 Philips Group • D1008

(FC) is initial footcandles at center of beam.  
Beam length (L) and beam width (W) are to where the candlepower is reduced to 50% of center beam candlepower.  
CBCP is center beam candlepower.  
(C) is distance to the center of the beam.

Lamp data shown is typical, and is based on bare lamp photometrics. Contact lamp manufacturers for availability and performance.



Lamps	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° AIMING ANGLE				30° AIMING ANGLE				30° AIMING ANGLE				45° AIMING ANGLE					
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W				
MR-16 LOW VOLTAGE HALOGEN BI-PIN LAMPS																					
 20W MR-16 VNSP (EZC)		8200	3000	7' 167	0.9'	0.9'		6' 3.5'	148	1.0'	0.8'		2' 3.5'	256	1.0'	0.5'		4' 4.0'	181	1.0'	0.7'
				10' 82	1.2'	1.2'		9' 5.2'	66	1.5'	1.3'		3' 5.2'	114	1.5'	0.7'		6' 6.0'	81	1.5'	1.0'
				13' 49	1.6'	1.6'		12' 6.9'	37	2.0'	1.7'		4' 6.9'	84	2.0'	1.0'		8' 8.0'	45	2.0'	1.4'
				16' 32	2.0'	2.0'		15' 8.7'	24	2.3'	2.1'		5' 8.7'	41	2.5'	1.2'		10' 10.0'	29	2.5'	1.7'
 20W MR-16 NSP (ESX)		3600	3000	6' 100	1.4'	1.4'		5' 2.9'	94	1.5'	1.3'		2' 3.5'	113	1.9'	0.9'		3' 3.0'	141	1.4'	1.0'
				8' 56	1.8'	1.8'		7' 4.0'	48	2.1'	1.8'		3' 5.2'	50	2.8'	1.4'		5' 5.0'	51	2.3'	1.6'
				10' 36	2.3'	2.3'		9' 5.2'	29	2.7'	2.4'		4' 6.9'	28	3.8'	1.8'		7' 7.0'	26	3.2'	2.3'
				12' 25	2.7'	2.7'		11' 6.4'	19	3.4'	2.9'		5' 8.7'	18	4.7'	2.3'		9' 9.0'	16	4.2'	2.9'
 20W MR-16 FL (BAB)		525	4000	2' 131	1.5'	1.5'		2' 1.2'	85	2.0'	1.7'		1' 1.7'	66	4.8'	1.5'		2' 2.0'	46	3.4'	2.1'
				3' 58	2.2'	2.2'		3' 1.7'	38	3.0'	2.5'		2' 3.5'	16	9.7'	2.9'		3' 3.0'	21	5.0'	3.1'
				4' 33	2.9'	2.9'		4' 2.3'	21	4.1'	3.4'		3' 5.2'	7	14.5'	4.4'		4' 4.0'	12	6.7'	4.1'
				5' 21	3.6'	3.6'		5' 2.9'	14	5.1'	4.2'		4' 6.9'	4	19.3'	5.8'		5' 5.0'	7	8.4'	5.1'
 35W MR-16 NSP (FRB)		8700	4000	7' 178	1.5'	1.5'		6' 3.5'	157	1.7'	1.5'		2' 3.5'	272	1.7'	0.8'		4' 4.0'	192	1.7'	1.2'
				10' 87	2.1'	2.1'		9' 5.2'	70	2.5'	2.2'		3' 5.2'	121	2.6'	1.3'		6' 6.0'	85	2.6'	1.8'
				13' 51	2.7'	2.7'		12' 6.9'	39	3.4'	2.9'		4' 6.9'	68	3.5'	1.7'		8' 8.0'	48	3.4'	2.4'
				16' 34	3.4'	3.4'		15' 8.7'	24	4.2'	3.6'		5' 8.7'	44	4.3'	2.1'		10' 10.0'	31	4.3'	3.0'
 35W MR-16 SP (FRA)		3900	4000	6' 108	2.1'	2.1'		5' 2.9'	101	2.4'	2.0'		1' 1.7'	222	3.1'	1.4'		3' 3.0'	153	2.2'	1.5'
				8' 61	2.8'	2.8'		7' 4.0'	52	3.3'	2.9'		2' 3.5'	54	4.7'	2.1'		5' 5.0'	55	3.6'	2.5'
				10' 39	3.5'	3.5'		9' 5.2'	31	4.3'	3.7'		3' 5.2'	30	6.2'	2.8'		7' 7.0'	28	5.1'	3.5'
				12' 27	4.2'	4.2'		11' 6.4'	21	5.2'	4.5'		5' 8.7'	20	7.8'	3.5'		9' 9.0'	17	6.6'	4.5'
 35W MR-16 FL (FMV)		1600	4000	4' 100	2.9'	2.9'		3' 1.7'	115	3.0'	2.5'		1' 1.7'	200	4.8'	1.5'		3' 3.0'	153	2.2'	1.5'
				6' 44	4.4'	4.4'		5' 2.9'	42	5.1'	4.2'		2' 3.5'	50	9.7'	2.9'		4' 4.0'	35	6.7'	4.1'
				8' 26	5.8'	5.8'		7' 4.0'	21	7.1'	5.8'		3' 5.2'	22	14.5'	4.4'		5' 5.0'	23	8.4'	5.1'
				10' 16	7.3'	7.3'		9' 5.2'	13	9.1'	7.6'		4' 6.9'	13	19.3'	5.8'		6' 6.0'	16	10.1'	6.2'
 37W MR-16 IR (INSP)		11500		6' 180	1.4'	1.4'		7' 4.0'	152	1.6'	1.4'		3' 5.2'	160	2.1'	1.0'		5' 5.0'	163	1.8'	1.2'
				12' 80	2.1'	2.1'		10' 5.8'	75	2.3'	2.0'		4' 6.9'	90	2.9'	1.4'		7' 7.0'	83	2.5'	1.7'
				16' 45	2.8'	2.8'		13' 7.5'	44	3.0'	2.8'		5' 8.7'	58	3.6'	1.7'		9' 9.0'	50	3.2'	2.2'
				20' 29	3.5'	3.5'		16' 9.2'	29	3.7'	3.2'		6' 10.4'	40	4.3'	2.1'		11' 11.0'	34	3.9'	2.7'
 37W MR-16 IR (NFL)		3500	4000	6' 97	2.7'	2.7'		5' 2.9'	91	3.0'	2.6'		2' 3.5'	109	4.2'	1.8'		3' 3.0'	137	2.8'	1.9'
				8' 55	3.5'	3.5'		7' 4.0'	46	4.2'	3.6'		3' 5.2'	49	6.2'	2.7'		5' 5.0'	49	4.7'	3.1'
				10' 35	4.4'	4.4'		9' 5.2'	28	5.4'	4.6'		4' 6.9'	27	8.3'	3.5'		7' 7.0'	25	6.5'	4.4'
				12' 24	5.3'	5.3'		11' 6.4'	19	6.6'	5.6'		5' 8.7'	18	10.4'	4.4'		9' 9.0'	15	8.4'	5.6'
 37W MR-16 IR (FL)		2050	4000	4' 128	2.9'	2.9'		3' 1.7'	148	3.0'	2.5'		1' 1.7'	258	4.8'	1.5'		3' 3.0'	61	5.0'	3.1'
				6' 57	4.4'	4.4'		5' 2.9'	53	5.1'	4.2'		2' 3.5'	64	9.7'	2.9'		4' 4.0'	45	6.7'	4.1'
				8' 32	5.8'	5.8'		7' 4.0'	27	7.1'	5.8'		3' 5.2'	28	14.5'	4.4'		5' 5.0'	29	8.4'	5.1'
				10' 21	7.3'	7.3'		9' 5.2'	16	9.1'	7.6'		4' 6.9'	15	19.3'	5.8'		6' 6.0'	20	10.1'	6.2'
 42W MR-16 VNSP (EZY)		13,100	3500	8' 205	1.3'	1.3'		7' 4.0'	174	1.5'	1.3'		3' 5.2'	182	1.9'	0.9'		5' 5.0'	185	1.6'	1.1'
				12' 91	1.9'	1.9'		10' 5.8'	85	2.1'	1.8'		4' 6.9'	102	2.6'	1.3'		7' 7.0'	96	2.2'	1.6'
				16' 51	2.5'	2.5'		13' 7.5'	50	2.7'	2.4'		5' 8.7'	66	3.2'	1.6'		9' 9.0'	57	2.8'	2.0'
				20' 33	3.1'	3.1'		16' 9.2'	33	3.4'	2.9'		6' 10.4'	45	3.8'	1.9'		11' 11.0'	38	3.5'	2.4'
 42W MR-16 NFL (EYS)		2400	4000	4' 150	1.9'	1.9'		3' 1.7'	173	2.0'	1.7'		1' 1.7'	300	2.3'	1.0'		3' 3.0'	84	3.1'	2.0'
				6' 67	2.9'	2.9'		5' 2.9'	62	3.3'	2.8'		2' 3.5'	64	4.6'	1.5'		4' 4.0'	53	4.1'	2.7'
				8' 38	3.8'	3.8'		7' 4.0'	32	4.6'	3.9'		3' 5.2'	33	7.0'	2.9'		5' 5.0'	34	5.1'	3.4'
				10' 24	4.8'	4.8'		9' 5.2'	15	5.9'	5.0'		4' 6.9'	19	9.3'	3.6'		6' 6.0'	24	6.1'	4.1'
 50W MR-16 NSP (EXT)		10,200	4000	8' 159	2.0'	2.0'		7' 4.0'	135	2.3'	2.0'		3' 5.2'	142	3.1'	1.5'		5' 5.0'	144	2.5'	1.7'
				12' 71	2.8'	2.8'		10' 5.8'	66	3.3'	2.8'		4' 6.9'	80	4.1'	2.0'		7' 7.0'	74	3.5'	2.4'
				16' 40	3.8'	3.8'		13' 7.5'	39	4.3'	3.7'		5' 8.7'	51	5.1'	2.5'		9' 9.0'	45	4.5'	3.1'
				20' 26	4.8'	4.8'		15' 8.2'	28	5.3'	4.5'		6' 10.4'	35	6.2'	2.9'		11' 11.0'	30	5.5'	3.8'
 50W MR-16 NFL (EXZ)		3400	4000	6' 94	2.9'	2.9'		5' 2.9'	88	3.3'	2.8'		2' 3.5'	106	4.6'	1.9'		3' 3.0'	134	3.1'	2.0'
				8' 53	3.8'	3.8'		7' 4.0'	45	4.6'	3.9'		3' 5.2'	47	7.0'	2.9'		5' 5.0'	48	5.1'	3.4'
				10' 34	4.8'	4.8'		9' 5.2'	27	5.9'	5.0'		4' 6.9'	37	9.3'	3.6'		7' 7.0'	25	7.1'	4.8'
				12' 24	5.8'	5.8'		11' 6.4'	18	7.2'	6.1'		5' 8.7'	17	11.6'	4.8'		9' 9.0'	15	9.2'	6.1'
 50W MR-16 FL (EXN)		1850	4000	4' 116	2.9'	2.9'		3' 1.7'	134	3.0'	2.5'		1' 1.7'	231	4.8'	1.5'		3' 3.0'	73	5.0'	3.1'
				6' 51	4.4'	4.4'		5' 2.9'	48	5.1'	4.2'		2' 3.5'	58	9.7'	2.9'		4' 4.0'	41	6.7'	4.1'
				8' 29	5.8'	5.8'		7' 4.0'	25	7.1'	5.9'		3' 5.2'	26	14.5'	4.4'		5' 5.0'	26	8.4'	5.1'
				10' 19	7.3'	7.3'		9' 5.2'	15	9.1'	7.6'		4' 6.9'	14	19.3'	5.8'		6' 6.0'	18	10.1'	6.2'
 50W MR-10 WFL (FMV)		1150	4000	3' 128	3.1'	3.1'		3' 1.7'	83	4.6'	3.6'		1' 1.7'	144	22.3'	2.1'		2' 2.0'	102	5.7'	2.9'
				5' 46	5.2'	5.2'		5' 2.9'	30	7.6'	6.0'		2' 3.5'	36	44.5'	4.2'		3' 3.0'	45	8.6'	4.4'
				7' 23	7.3'	7.3'		7' 4.0'	15	10.7'	8.4'		3' 5.2'	16	66.8'	6.2'		4' 4.0'	25	11.4'	5.9'
				9' 14	9.4'	9.4'		9' 5.2'	9	13.7'	10.6'		4' 6.9'	9	89.1'	8.3'		5' 5.0'	16	14.3'	7.4'
 73W MR-16 SP		14000	4000	8' 219	1.4'	1.4'		7' 4.0'	186	1.6'	1.4'		3' 5.2'	194	2.1'	1.0'		5' 5			